



LISTED S24465

Digital Manual Call Point

DI-M9204

Description

Designed for the purpose of raising an alarm manually once verification of a fire or emergency condition has occurred. By pressing the non breakable glass. Meets the standard requirement of UL.

The DI-M9204 constructed of high impact red ABS with a modern pleasing appearance. The terminating back box enables first fix installation and termination leaving the fascia with integral electronics to be simply plugged into base at the time of commissioning. Non breakable glass that can be reset with the GST standard reset key.

The DI-M9202 operated via a micro-switch that when pressed a signal will be transmitted to the panel. Contains integral LED indicator to confirm operation.

Electronic addressing can be done through Handheld Programming device (P-9910B), purchased separately.

Features and Benefits


- Listed to UL
- Semi-Flush mounted
- Compatible with latest EN standards
- Re-settable (non-breaking glass)
- Optional flipping plastic cover (D-92FC)
- Optional back box for surface mount
- LED indicator
- Friendly installation and test

Technical Specifications

- Approval: UL
- Protection rating: IP 43
- Operating voltage: 24Vdc Loop
- Operating current:
 - Standby current 0.6mA
 - Alarm Current 1.8mA
- Operating temperature: -10°C to +50°C
- Relative humidity: 95%
- Application: Indoor use
- Visual Indicator: LED, Red (lit steady when alarm, 3 sec interval blinking at normal state)
- Front Cover: Plastic glass (optional)
- Material and colour: ABS, red
- Wiring: 1 pair non polarized
- Dimensions:
 - 87.1mmx87.1mmx58mm (with backbox)
 - 87.1mmx87.1mmx23mm (without back box)

Mounting Base

The manual call point should be installed in compliance with all local codes having a jurisdiction in your area or NFPA 72 National Fire Alarm Code, NFPA 70 National Electrical Code, BS 5389 and EN54. Surface mount and it is installed onto a standard one gang electrical box with a mounting hole that has 52mm-68mm spacing.

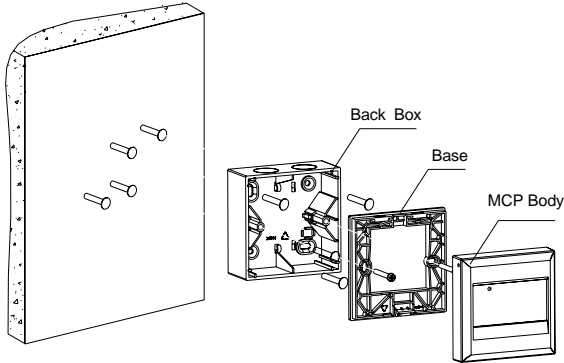


Ordering Information



Part Number: DI-M9204
Description: Digital Manual Call Point
Weight / Kg.: 0.16
Pack Qty. per Box: 50

Accessories




Part Number: D-92FC
Description: Anti Tamper Security Cover
Weight / Kg.: 0.03
Pack Qty. per Box: 250



Part Number: D-92WPB
Description: Weather Proof Box
Weight / Kg.:
Pack Qty. per Box: 8

Wiring and Connection

Terminals on the MCP base are shown:

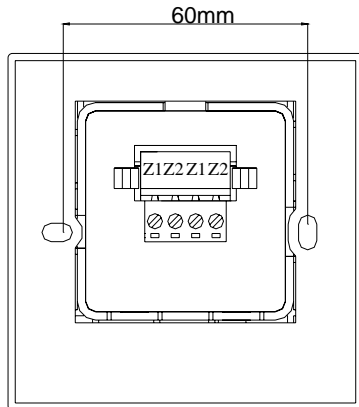

I+, I-: Input signal, connecting with compatible control panel or the previous MCP.

O+, O-: Output signal, connecting with the next MCP.

