



16 Zones Conventional Repeater Panel

GST-RP16

Description

GST-RP-16 Conventional Repeater Panels, the supporting products of conventional fire panel, is a type of fire display unit used in building or fire control center. When the conventional fire panels received fire signal, it will alarm and send the signals to the GST-RP16, then the GSTRP-16 will indicate the alarm zone and sound to notice the people there accordingly.

Technical Specifications


- Operating voltage: 18Vdc to 28Vdc polarized
- Operating Current:
- Standby: 12mA; Alarm:60mA
- Operating temperature: 0°C to +40°C
- Relative humidity: 95%
- Display Capacity: 16 Zone Fire Signal
Common Fault signal
- Application: Indoor use
- Material and colour:
- Wiring: Multi-wire (16 for zone signal, 2 for fault signals) and two for power supply cable.
- Dimensions: 280mm x 110mm x 46mm

Features and Benefits

1. Compatible with GST 101, 102,104.108 and GST 116
2. Powered from Fire Panel directly
3. Zone Fire and general Fault Indication
4. Description

Wiring and Connection

GST-RP16 CONVENTIONAL REPEATER PANEL

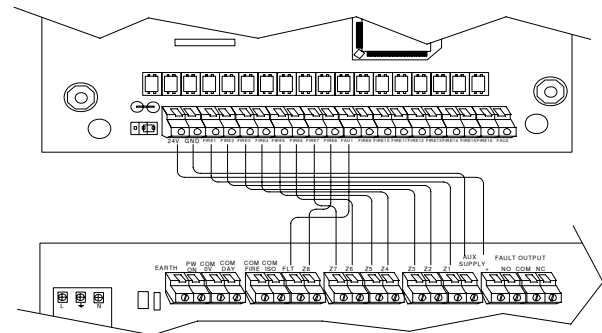

Selection of compatible Control Panels

Compatible with GST108/116 Conventional panel.

Ordering Information

Part Number: GST-RP16
Description: Conventional Repeater Panel
Weight / Kg.: 0.900
Pack Qty. per Box: 120

